

08-21-00

A

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ATTY DOCKET NO.: 5051-441

DATE: August 18, 2000

**UTILITY PATENT APPLICATION TRANSMITTAL LETTER  
AND FEE TRANSMITTAL FORM (37 CFR 1.53(b))**

BOX PATENT APPLICATION

Commissioner for Patents

Washington, DC 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is:

- ☒ a patent application  
☐ a Continuation ☐ a Divisional ☐ a Continuation-in-Part (CIP) ☐ claiming priority from  
 prior provisional application nos.: 60/150,015; filed August 20, 1999 and 60/150,039;  
 filed August 20, 1999.  
☐ A Small Entity Statement(s) was filed in the prior application; Status still proper and desired.

Inventor(s) or Application Identifier:

**Joseph M. DeSimone**, Chapel Hill, North Carolina; **Eva R. Birnbaum**, Los Alamos, New Mexico;  
**Ruben G. Carbonell**, Raleigh, North Carolina; **Stephanie Crette**, Carrboro, North Carolina;  
**James B. McClain**, Durham, North Carolina; **T. Mark McCleskey**, Los Alamos, New Mexico;  
**Kimberly R. Powell**, Chapel Hill, North Carolina; **Timothy J. Romack**, Durham, North Carolina;  
**William Tumas**, Los Alamos, New Mexico.

Entitled: ***CARBON DIOXIDE-SOLUBLE POLYMERS AND SWELLABLE  
POLYMERS FOR CARBON DIOXIDE APPLICATIONS***

Enclosed are:

1. ☒ Application Transmittal Letter and Fee Transmittal Form (*A duplicate is enclosed for fee processing*)
2. ☒ 32 pages of Specification (including 48 claims)
3. ☒ 5 sheets of Formal Drawings (35 USC 113)
4. ☐ Oath or Declaration
  - a. ☐ newly executed (*original or copy*)
  - b. ☐ copy from prior application (37 CFR 1.63(d) (*for continuation/divisional*) [Note Box 5 Below]
  - c. ☐ **DELETION OF INVENTOR(S)** (*Signed statement deleting inventor(s) named in the prior application*)
5. ☐ Incorporation By Reference (*useable if box 4b is checked*)  
 The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (*Appendix*)
7. ☐ Assignment papers (*cover sheet(s) and document(s)*)
8. ☐ Small Entity Statement(s)
9. ☒ Information Disclosure Statement, PTO-1449, and 39 references cited
10. ☐ Preliminary Amendment (*Please enter all claim amendments prior to calculating the filing fee.*)


11. ☐ English Translation Document  
 12. ☐ Certified Copy of  
 13. ☐ Sequence Listing/ Sequence Listing Diskette  
     a. ☐ computer readable copy  
     b. ☐ paper copy  
     c. ☐ statement in support  
 14. ☐ An Associate Power of Attorney  
 15. ☒ Return Receipt Postcard (MPEP 503) *(Should be specifically itemized)*  
 16. ☒ Other: Letter under 37 C.F.R. 1.41(c)

The fee has been calculated as shown below:

	Column 1 No. Filed	Column 2 No. Extra	Small Entity Rate      Fee	Large Entity Rate      Fee
BASIC FEE			\$345.00	\$690.00
TOTAL CLAIMS	48 - 20 =	28	x 09 = \$	x 18 = \$504.00
INDEP CLAIMS	4 - 3 =	1	x 39 = \$	x 78 = \$78.00
<input type="checkbox"/> MULTIPLE Dependent Claims Presented			+ 130 = \$	+ 260 = \$
<i>If the difference in Col. 1 is less than zero, Enter "0" in Col. 2</i>			Total    \$	Total = \$1,272.00

- ☒ A check in the amount of \$1,272.00 to cover the filing fee is enclosed.
- ☐ A check in the amount of \$            is enclosed to cover the filing fee, PLUS the Assignment Recordation fee (\$40.00).
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-0220.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 37 CFR 1.17.

Respectfully submitted,



Robert J. Smith

Registration No. 40,820

Correspondence Address:

USPTO Customer Number: **20792**

Myers Bigel Sibley & Sajovec

Post Office Box 37428

Raleigh, North Carolina 27627

Telephone (919) 854-1400


Facsimile (919) 854-1401

**CERTIFICATE OF EXPRESS MAILING**

Express Mail Label No. EL481790948US

Date of Deposit: August 18, 2000

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box Patent Application, Commissioner For Patents, Washington, DC 20231.



Robert J. Smith

Date of Signature: August 18, 2000

**CARBON DIOXIDE-SOLUBLE POLYMERS AND SWELLABLE POLYMERS  
FOR CARBON DIOXIDE APPLICATIONS**

**Cross-Reference to Related Applications**

5           The application claims priority to U.S. Provisional Applications  
60/150,015 filed August 20, 1999 and 60/150,039 filed August 20, 1999, the  
disclosures of which are incorporated herein by reference in their entirety.

**Field of the Invention**

10           This invention generally relates to compositions containing polymers  
useful in carbon dioxide processes.

**Background of the Invention**

15           Separation and catalytic reaction processes play an extremely  
significant role in the chemical and materials process industry. With respect  
to catalysis, there is currently a high level of interest directed toward catalyst  
systems with improved selectivity, activity, and recovery for the synthesis of a  
wide range of chemicals. Of particular interest are specialty chemicals,  
particularly chiral compounds which are believed to be important to the  
20   agrochemical and pharmaceutical industries.

          Catalysis processes involving complex chelating (often chiral)  
bisphosphine and aminophosphine ligands with precious metals such as  
rhodium, platinum, and palladium has received a high level of attention. The



### **Summary of the Invention**

In one aspect, the invention provides a method for carrying out a catalytic reaction in carbon dioxide. The invention comprises contacting a mixture with a catalyst bound to a polymer wherein the reactant interacts with the catalyst to form a reaction product. The fluid mixture comprises at least one reactant and carbon dioxide.

The polymer that is employed in accordance with the invention may be either soluble or insoluble in the carbon dioxide. Such polymers preferably comprise at least one "carbon dioxide soluble" ("carbon dioxide-philic") segment that has an affinity for carbon dioxide. Polymers that are insoluble in carbon dioxide are typically crosslinked. In various embodiments, these polymers may be considered "swellable" in the carbon dioxide as defined in greater detail herein, although other types of polymers may be employed.

In another aspect, the invention provides a composition of matter comprising carbon dioxide and a polymer present in the carbon dioxide. The polymer has bound thereto a catalyst at a plurality of chains along the length of the polymer.

In another aspect, the invention provides a method of separating at least one component from a fluid mixture. The method comprises contacting a polymer with a fluid mixture comprising at least one component and carbon dioxide. The carbon dioxide interacts with the polymer and separates from the fluid mixture such that the fluid mixture has an increased concentration of the at least one component.

These and other aspects are provided by the present invention.

### **Brief Description of the Drawings**

**FIG. 1** illustrates the effect of 1,1'-dihydroperfluorooctyl methacrylate ("FOMA") in a polymer on the percent swelling of the polymer.

**FIG. 2** illustrates the effect of FOMA in a polymer on the percent swelling of the polymer.

**FIG. 3** illustrates the effect of carbon dioxide pressure and FOMA content on percent polymer swelling using divinyl benzene as the crosslinker.

**FIG. 4** illustrates the effect of carbon dioxide pressure and FOMA content on percent polymer swelling using ethylene glycol dimethacrylate as the crosslinker.

**FIGS. 5A** and **5B** are SEM photographs of swellable polymers produced in accordance with the invention. **FIGS. 5A** and **5B** illustrate polymers each comprising 5 weight percent styrene, 80 weight percent ethylene glycol dimethacrylate, and 15 weight percent FOMA. Each polymer has a porosity of 230 m<sup>2</sup>/g measured by N<sub>2</sub>-BET.

**FIGS. 6A** and **6B** are SEM photographs comparing a swellable crosslinked fluoropolymer beads (**FIG. 6A**) with porous fluoropolymer beads (**FIG. 6B**). The fluoropolymer of **FIG. 6A** comprises 34 weight percent of styrene, 60 weight percent of FOMA, and 6 weight percent of crosslinker. The polymer has a porosity of 0.3 m<sup>2</sup>/g measured by N<sub>2</sub>-BET. The fluoropolymer of **FIG. 6B** comprises 5 weight percent of styrene, 15 weight percent of FOMA, and 80 percent of crosslinker. The polymer has a porosity of 230 m<sup>2</sup>/g measured by N<sub>2</sub>-BET.

#### **Detailed Description of Preferred Embodiments**

The invention will now be described with reference to its more preferred embodiments. It should be understood, however, that these embodiments are for illustrative purposes only, and do not serve to limit that scope of the invention.

In one aspect, the invention provides a method for carrying out a catalytic reaction in carbon dioxide. The invention comprises contacting a mixture with a catalyst bound to a polymer wherein the reactant interacts with the catalyst to form a reaction product. The fluid mixture comprises at least one reactant and carbon dioxide. In another aspect, the invention provides a composition of matter. The composition comprises carbon dioxide and a polymer in the carbon dioxide. The polymer has bound thereto a catalyst at a plurality of locations along the chain of the polymer.

Carbon dioxide used to carry out the present invention may be in a gas, liquid, or supercritical state. Carbon dioxide is employed as a solvent. Liquid and supercritical carbon dioxide are preferred. If liquid CO<sub>2</sub> is used,

the temperature employed during the process is preferably below 31°C. If gaseous CO<sub>2</sub> is used, it is preferred that the phase be employed at high pressure, preferably above atmospheric and below the vapor pressure of CO<sub>2</sub>. The term "high pressure" generally refers to CO<sub>2</sub> having a pressure from  
5 about 150 psia to about 50,000 psia. In one embodiment, the CO<sub>2</sub> is utilized in a "supercritical" phase. As used herein, "supercritical" means that a fluid medium is above its critical temperature and pressure, i.e., about 31°C and about 71 bar. The thermodynamic properties of CO<sub>2</sub> are reported in Hyatt, *J. Org. Chem.* **49**: 5097-5101 (1984); therein, it is stated that the critical  
10 temperature of CO<sub>2</sub> is about 31°C; thus the method of the present invention may be carried out at a temperature above 31°C. For the purposes of the invention, it is preferred to employ CO<sub>2</sub> at a pressure ranging from at a lower end of about 150 psia to an upper end of about 50,000 psia. It is preferred that carbon dioxide be employed as a continuous phase. In a preferred  
15 embodiment, the fluid mixture comprises from about 50 to about 99 percent by weight of carbon dioxide, and more preferably from about 75 or 80 to about 99 percent by weight.

In addition, other materials that are a gas at standard temperature and pressure (STP) and can be transformed to a liquid or a supercritical fluid  
20 under increased (i.e., superatmospheric) pressure can be used instead of the carbon dioxide in the methods of the invention, particularly as solvents. The fluid preferably is one that is not potentially harmful to the atmosphere and is non-toxic towards humans, animals, and plants when vented or released. Other such fluids include hydrofluorocarbons (HFCs) and perfluorocarbons  
25 (e.g., perfluoropropane and perfluorocyclobutane) that are gases at STP, hydrocarbons that are gases at STP, polyatomic gases, noble gases, and mixtures thereof. Other fluorosolvents may be used. Useful polyatomic gases include SF<sub>6</sub>, NH<sub>3</sub>, N<sub>2</sub>O, and CO. Preferred reaction fluids include HFCs, perfluorocarbons, and mixtures thereof. Examples of useful HFCs include  
30 those that are known to be good solvents for many small organic compounds, especially those HFCs that comprise from 1 to 5 carbon atoms. Specific examples include 1,1,2,2-tetrafluoroethane, 1,1,1,2-tetrafluoroethane, trifluoromethane, and 1,1,1,2,3,3,3-heptafluoropropane. Compatible mixtures of any two or more of the foregoing also can be used as the fluid. It is

preferred that the fluid mixture comprise from about 50 to about 99 percent by weight of any of the above components, and more preferably from about 75 or 80 to about 99 percent by weight of any of the above components.

A cosolvent may be added to the reaction mixture if desired.

- 5 Cosolvents that may be used in carrying out the present invention are typically organic cosolvents such as methanol, ethanol, ethyl acetate, tetrahydrofuran, alcohols, liquid alkanes, methylene chloride, chloroform, toluene, water, ketones, and esters. Fluorosolvents, particularly those which are not gases may also be used. If used, the cosolvent may be employed in various
- 10 amounts, preferably from above 0 to about 50 percent based on the weight of the composition.

- In one embodiment, carbon dioxide soluble polymers may be employed. "Soluble" as used herein with respect to the solubility of the polymers in the carbon dioxide (with or without the cosolvent) is specifically
- 15 intended to include both fully soluble and partially soluble polymers, as long as some of the polymer is solubilized in the carbon dioxide. The polymer may be soluble in the carbon dioxide (and in some embodiments is preferably soluble in the carbon dioxide). In other instances, the polymer may be insoluble in carbon dioxide, but may be swellable in the carbon dioxide. For
- 20 the purposes of the invention, the term "swellable" refers to the carbon dioxide being able to penetrate or plasticize the polymer. In this instance, the polymer may be present in the form of a crosslinked network (chemically and physically), preferably as beads, a film, or both. Beads may vary in size. In one embodiment, the beads may vary from about 40  $\mu\text{m}$  to about 450  $\mu\text{m}$ .
- 25 Carbon dioxide insoluble polymers that may not be considered swellable can be crosslinked.

- In various embodiments, polymers that may be used to carry out the present invention are preferably polymers that contain a  $\text{CO}_2$ -philic group, and which polymers are soluble in carbon dioxide. These materials are described
- 30 in U.S. Patent Nos. 5,783,082; 5,589,105; 5,639,836; and 5,451,633 to DeSimone et al.; 5,676,705; and 5,683,977 to Jureller et al., the disclosures of which are incorporated herein by reference in their entirety. Examples of  $\text{CO}_2$ -philic groups include silicone-containing groups or polysiloxanes,




halogen (particularly fluorine) containing groups or halo (particularly fluoro)carbons, and branched polyalkylene oxides and fluorinated polyethers. If employed, the fluorine-containing segment is typically a "fluoropolymer". As used herein, a "fluoropolymer" has its conventional meaning in the art and should also be understood to include low molecular weight oligomers, i.e., those which have a degree of polymerization greater than or equal to two. See generally Banks et al., *Organofluorine Compounds: Principals and Applications* (1994); see also *Fluorine-Containing Polymers*, 7 Encyclopedia of Polymer Science and Engineering 256 (H. Mark et al. Eds. 2d Ed. 1985).

Exemplary fluoropolymers are formed from monomers which may include fluoroacrylate monomers such as 2-(N-ethylperfluorooctane- sulfonamido) ethyl acrylate ("EtFOSEA"), 2-(N-ethylperfluorooctane- sulfonamido) ethyl methacrylate ("EtFOSEMA"), 2-(N-methylperfluorooctane- sulfonamido) ethyl acrylate ("MeFOSEA"), 2-(N-methylperfluorooctane- sulfonamido) ethyl methacrylate ("MeFOSEMA"), 1,1'-dihydroperfluorooctyl acrylate ("FOA"), 1,1'-dihydroperfluorooctyl methacrylate ("FOMA"), 1,1',2,2'-tetrahydroperfluoroalkylacrylate, 1,1',2,2'-tetrahydroperfluoroalkyl-methacrylate and other fluoromethacrylates; fluorostyrene monomers such as  $\alpha$ -fluorostyrene and 2,4,6-trifluoromethylstyrene; fluoroalkylene oxide monomers such as hexafluoropropylene oxide and perfluorocyclohexane oxide; fluoroolefins such as tetrafluoroethylene, vinylidene fluoride, and chlorotrifluoroethylene; and fluorinated alkyl vinyl ether monomers such as perfluoro(propyl vinyl ether) and perfluoro(methyl vinyl ether). Copolymers using the above monomers may also be employed. Exemplary siloxane-containing segments include alkyl, fluoroalkyl, and chloroalkyl siloxanes. More specifically, dimethyl siloxanes and polydimethylsiloxane materials are useful. Mixtures of any of the above may be used.

The polymers may consist entirely of the CO<sub>2</sub>-philic group, or may be a copolymer of a CO<sub>2</sub>-philic group and a group that is not otherwise soluble in CO<sub>2</sub> ("CO<sub>2</sub>-phobic"). In a preferred embodiment, the CO<sub>2</sub>-philic group and the CO<sub>2</sub>-phobic are covalently bonded. Thus the term "polymer" as used herein includes "copolymer". Copolymers may be of any type, including random copolymers, block copolymers, graft copolymers, etc. The polymer may be linear or branched. Such polymers are known. See, e.g., U.S. Patent No.

5,739,223 to DeSimone (Method of Making Fluoropolymers), the disclosure of which is incorporated herein by reference in its entirety; see also U.S. Patent No. 5,676,705 to Jureller et al. Fluoropolymers, particularly fluoroacrylates, are preferred (including the copolymers thereof), the disclosures of which are incorporated herein by reference. Fluoroacrylates include those acrylates that are either fully or partially fluorinated.

In a preferred embodiment of the invention, the CO<sub>2</sub>-philic backbone is primarily comprised of a fluoropolymer such as those derived from fluorinated acrylate or methacrylate monomers (R = H, CH<sub>3</sub>; n = 1, 2; m = 1-10) See formula (I). Other suitable CO<sub>2</sub>-soluble materials for the composition of the polymeric backbone include fluorinated ethers, silicones, and phosphazenes.

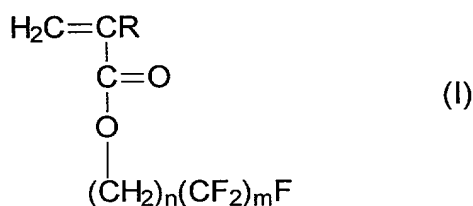

15

Synthesis of the polymer can be carried out by random copolymerization of a suitable monomer for the CO<sub>2</sub>-philic backbone with a comonomer bearing a functional group. In a preferred embodiment, the comonomer may be capable of serving as a ligand or a point of attachment for a ligand. For example, a random copolymer composed of telomer acrylate-n Zonyl® TAN by DuPont (a fluorinated acrylate monomer) and 2-(methacryloyloxy)ethyl acetoacetate (a ligand bearing monomer) can be synthesized via free radical solution polymerization initiated by 2,2'-azobisisobutyronitrile (AIBN) in α, α, α-trifluorotoluene (TFT) at 60 °C. If employed the amount of functionalized comonomer incorporated can be varied. Preferably, the comonomer is present in the range of about 1 to about 40 mol percent based on the weight of the composition, and more preferably from about 5 to about 25 mol percent.

As an example, a copolymer may be present as a linear random copolymer although alternating, block, graft or crosslinked copolymers of appropriate composition may be suitable. The copolymers may be prepared by any of a number of suitable processes such as bulk, suspension, or emulsion polymerization although in a preferred embodiment of the present invention the copolymers are prepared by solution polymerization. Most preferably, the polymerization solvent is either carbon dioxide or a fluoruous solvent such as TFT. Typical free radical initiators used for the polymerization are those capable of catalyzing the polymerization at temperatures in the range of 50°C to 70°C such as AIBN, lauroyl peroxide, benzoyl peroxide, and the like. The amount of initiator can be varied but is normally from about 0.1 to about 2 mol percent, more preferably 1 mol percent.

In general, the polymer is included in the composition in an amount of from about 1 or 2 percent to about 30 or 40 percent by weight. When included, the cosolvent is included in the composition in an amount of from about 0.1 or 1 percent to about 40 or 50 percent by weight.

Suitable CO<sub>2</sub>-phobic groups are known and include, without limitation, In accordance with the invention, the "CO<sub>2</sub>-phobic" segment has an affinity for the polymer material. Exemplary CO<sub>2</sub>-phobic segments may comprise common lipophilic, oleophilic, and aromatic polymers, as well as oligomers formed from monomers such as ethylene,  $\alpha$ -olefins, styrenics, acrylates, methacrylates, ethylene oxides, isobutylene, vinyl alcohols, acrylic acid, methacrylic acid, and vinyl pyrrolidone. The CO<sub>2</sub>-phobic segment may also comprise molecular units containing various functional groups such as amides; esters; sulfones; sulfonamides; imides; thiols; alcohols; dienes; diols; acids such as carboxylic, sulfonic, and phosphoric; salts of various acids; ethers; ketones; cyanos; amines; quaternary ammonium salts; and thiozoles. Mixtures of any of these components can make up the "CO<sub>2</sub>-phobic segment".

The swellable polymers that are insoluble in carbon dioxide may encompass a wide range of materials and may be formed from a number of suitable monomers. Examples of monomers include any of the CO<sub>2</sub>-phobic segments set forth herein such as, for example, styrenics,  $\alpha$ -olefins, ethylene oxides, dienes, amides, esters, sulfones, sulfonamides, imides, thiols, alcohols, diols, acids, ethers, ketones, cyanos, amines, quaternary

ammonium salts, acrylates, methacrylates, thiozoles, and mixtures thereof. These monomers may be copolymerized with other monomers set forth herein to form a crosslinked polymer that is swellable in carbon dioxide.

Any number of suitable crosslinkers can be used in forming the swellable polymers of the invention, the selection of which are known to one skilled in the art. Exemplary crosslinkers include those which may be incorporated into the swellable polymer such as, without limitation, divinylbenzene, ethylene glycol diacrylate, 1,4-cyclohexylene-bis(oxyethyl) dimethacrylate, 1,4-cyclohexylene-bis(oxypropyl) dimethacrylate, 1,4-cyclohexylene-bis(oxypropyl) diacrylate, ethylene glycol dimethacrylate, and mixtures thereof. Although not intending to be bound by theory, in one embodiment, the crosslinking agent serves to crosslink a CO<sub>2</sub>-phobic segment to a CO<sub>2</sub>-philic segment. The crosslinking agent may therefore be incorporated into the polymer.

A wide number of catalysts may be used and are known by those who are skilled in the art. Suitable catalysts include but are not limited to those metal catalysts that are typically employed in epoxidation, hydrogenation, hydroformylation, hydrocarboxylation, and oxidative carbon-carbon single bond formation reactions. Examples of metals employed as catalysts include, but are not limited to, transition metal catalysts including such as Group IIIA, IVA, VA, VIA, VIIA, VIIIA, IB, IIB, IIIB, IVB, VB, VIB, and VIIB metals. Exemplary metals include, but are not limited to, ruthenium, rhodium, palladium, platinum, vanadium, and molybdenum. Fluorous-soluble materials such as those described in Horvath, I.T. et al., *J. Am. Chem. Soc.*, 1998 120 3133-3143, may also be used such as, for example,  $\text{HRh}(\text{CO})\{\text{P}[\text{CH}_2\text{CH}_2(\text{CF}_2)_5\text{CF}_3]_3\}_3$ .

Enzymatic catalysts can also be used if so desirable. For the purposes of the invention, the term "enzymatic catalyst" encompasses enzymes that serve as catalysts in carbon dioxide and that may be attached to the polymers. Examples of these materials include, but are not limited to, alcohol dehydrogenases, alcohol oxidase, aldolase, phosphatases, alpha-chymotrypsin, asparaginase, anhydrase, catalase, creatine kinase, glutaminase, oxidases, lipases, luciferase, urease, hydratase, peroxidase, subtilisin Carlsberg and BPN', thermolysin, superoxidase, nitrileamidase,

esterases, transaminase, trypsin, fumarase, amidase, acylase, peptidases, carboxylases, RNAses, glycolases, transeferases, and the like. Combinations of the above may be used. Other enzymes include, but are not limited to, enzymes derived from conventional microbial, plant, animal sources, or also from extremophiles.

The enzymatic catalysis reaction may be carried out under conditions known to one skilled in the art, and using known equipment. Preferably, a reaction is carried out at a temperature of a low end of about -50°C, -20°C, or 0° to a high end of about 100°C, 200°C or 350°C.

The enzymatic catalyst may be used with any of polymers set forth herein. As an example, an embodiment for incorporating an enzyme into a swellable polymer is as follows. An enzyme that it typically water-soluble is made soluble in organic media. Therefore, as a first step, the enzyme is treated in such a way that it becomes hydrophobic. Thus, the enzyme may be incorporated into a dispersed phase which is employed in an aqueous suspension polymerization. The dispersed phase also comprises monomers and initiator.

In reference to above, the enzyme may be made more hydrophobic by dissolving the enzyme in an aqueous solution mixed with an organic phase containing a surfactant. The surfactant forms an ion-pair with the enzyme allowing it to become more hydrophobic and partition into an organic phase.

The enzyme may incorporated into the polymer matrix in various ways, with two embodiments being described below. In one example, the enzyme is chemically modified to provide polymerizable moieties (e.g., acrylamide) which will react with the monomers in the dispersed phase. In another example, the enzyme will react with an enzyme attachment site already present in the swellable polymer matrix.

Preferably, the catalyst used in the invention is employed in an amount ranging from above 0 to about 40 mol percent based on the polymer.

In a preferred embodiment, the catalyst (particularly the catalyst containing a transition metal) is bound to a ligand that is bound to the polymer at a plurality of locations along the chain of the polymer. Ligands that may be used to carry out the present invention include a ligand that is attached to the polymer backbone and is pendant to the backbone. Examples of ligands are

set forth in co-pending application Serial No. 09/185,891 filed November 4, 1998, the disclosure of which is incorporated herein by reference in its entirety. Examples of such ligands include  $\beta$ -diketone, phosphate, phosphite, salen, bis imine, pyridine-bisimine, imidazole, pyrazolyl borate, pyridine, bi-  
5 and tripyridine, porphyrin, phthalocyanine, cyclopentadienyl, phosphonate, phosphinic acid, phosphine (e.g., alkyl, aryl, mono, bis, tris, and the like), thiophosphinic acid, dithiocarbamate, amino, ammonium, hydroxyoxime, hydroxamic acid, calix(4)arene, macrocyclic, crown ether, 8-hydroxyquinoline, picolylamine, thiol, and carboxylic acid ligands. Multiple  
10 types of ligands may be incorporated onto the same polymer backbone. Chiral ligands may also be employed.

Monodentate or polydentate ligands can be used if desired. O-donating chelating agents such as cupferron, chloroanillic acid and related agents,  $\beta$ -diketones, N-benzoyl-N-phenylhydroxylamine agents, macrocyclic  
15 compounds, etc; N-donating agents such as  $\alpha$ -dioximines, diaminobenzidine and related reagents, porphyrines and related agents, etc; O,N-donating agents such as 8-hydroxyquinoline, nitrosonaphthols and nitrosophenols, ethylenediaminetetraacetic acid (EDTA) and other complex ionates, diphenylcarbazine and diphenylcarbazone, azoazoxy BN, etc.; S-donating  
20 chelating agents such as sodium diethyldithiocarbamate and related agents, dithiazone and related agents, bismuthiol II, thiothenoyltrifluoroacetone, thioxine, etc.; and P-donating chelating agents such as tributylphosphate and related agents, etc.

The ligands may be attached (e.g., covalently bound) to the polymers  
25 using various techniques. Examples of suitable techniques include, but are not limited to, copolymerization of a monomer containing a ligand with a  $\text{CO}_2$ -philic monomer, derivatization of a homopolymer, derivatization of a copolymer, or other variations thereof that will be apparent to those skilled in the art based on the disclosure provided herein. As an example, methods  
30 for the attachment of phosphine groups to alkyl halide functionalized polymers and monomers are described (see Hodge and Sherrington (ed) "*Polymer Supported Reactions in Organic Synthesis*, John Wiley and Sons, (1980)). Additionally, diphenylphosphino alkylamines may react with N-hydroxy-



result of the epoxidation reactions. Hydrogenation reactions typically result in olefins being reacted to form alkyls. Hydroformylation reactions usually result in the olefins being reacted to form aldehydes. Carbon-carbon coupling reactions typically provides products resulting from the formation of a new carbon-carbon double bond.

The method may also include other steps if desired. For example, in one embodiment, the method further comprises the step of separating the catalyst and polymer from the carbon dioxide, and reaction product by techniques known in the art, e.g., venting. The catalyst may then be reused if so desired by the end user.

The swellable polymers, for example swellable beads, that has catalyst bound thereto, may be separated from the reaction products and unreacted starting materials via techniques that are known. One such technique is illustrated in U.S. Patent No. 5,242,877 to Dobson et al., the disclosure of which is incorporated herein by reference in its entirety.

The soluble polymers having catalyst bound thereto can be separated from the reaction products, unreacted material, and carbon dioxide using various techniques. For example, temperature and/or pressure conditions can be manipulated to assist in such separation. To illustrate further, polymer with catalyst bound thereto is soluble in carbon dioxide at a given temperature and pressure. When the products are to be separated from the bulk reaction medium, the temperature and/or pressure are adjusted such that the polymer with bound catalyst precipitates. The reaction products are typically soluble in carbon dioxide and a separation process set forth herein may be employed to isolate the carbon dioxide, reaction products, unreacted starting material, and polymer.

A general procedure for carrying out the invention is as follows. The preparation of the polymer may take place according to the embodiment described below. A fluoromonomer is randomly copolymerized with a functionalized monomer. As an example, at 65 °C in a fluorinated solvent ( $\alpha\alpha\alpha$ -trifluorotoluene (TFT)) or carbon dioxide, a fluorinated acrylate or methacrylate monomer such as Zonyl TA-N (DuPont) is randomly copolymerized with a functionalized monomer using a radical initiator such as



2,2'-azobisisobutyronitrile (AIBN). The comonomer is preferably an acrylate, methacrylate, or styrenic monomer, however other comonomers may be employed. Examples of comonomers include, but are not limited to, vinyl benzyl acetylacetone (VBA), 2-methacryloyloxyethylacetoacetate, N-acryloxy-succinimide, 2-bromoethylacrylate (BEA), vinylbenzyl chloride (VBC), glycidyl methacrylate (GMA), N,N'-dimethylaminoethyl methacrylate (DMAEMA), vinyl pyridine, 1-vinyl imidazole, acryloyl chloride, vinyl benzaldehyde, and vinyl benzylalcohol. Mixtures of the above may be employed. After a sufficient reaction time (e.g., 20 hours), the polymer is typically isolated by precipitation (pouring fluorinated solvent solution into methanol or venting carbon dioxide).

In another aspect, the invention relates to a method of separating at least one component from a fluid mixture. The method comprises contacting a swellable polymer with a fluid mixture. The fluid mixture comprises at least one component and carbon dioxide. The carbon dioxide penetrates or plasticizes into the polymer such that component is separated from the carbon dioxide.

A number of components may be separated from the carbon dioxide. Examples include, but are not limited to, organics (e.g., methane and other light hydrocarbons typically encountered in oil and fuel applications, e.g., C<sub>1</sub> to C<sub>8</sub> hydrocarbons, more preferably C<sub>1</sub> to C<sub>4</sub>), volatile organic contaminants (VOCs); monomers; initiators; chlorofluorocarbons; mercaptans; and other contaminants. Other components that may be separated from carbon dioxide include, but are not limited to, water, nitrogen, helium and other noble gases, and hydrogen. The components may be present in two-component or multi-component mixtures. Preferably, the method of the invention allows for at least 10 percent enhancement of concentration.

The method of separation may take place in various configurations known to one skilled in the art. Typically, the swellable polymer is employed as beads in a packed column. In other embodiments, the swellable polymer may be used as a thin film, a membrane, or as a composite membrane, such as in a hollow fiber separating device.

Depending on the application, the polymers that are insoluble in carbon dioxide may be considered swellable (i.e., relatively non-porous) or more

highly porous. The more highly swellable polymers are particularly well suited for separation methods of the invention, while the more highly porous polymers are well suited for catalysis methods. A more highly swellable polymer preferably has a porosity ranging from about 0.1 to about 1 m<sup>2</sup>/g as determined by N<sub>2</sub>-BET (more preferably from about 0.2 to 0.4 m<sup>2</sup>/g) and a more highly porous polymer has a preferred porosity ranging from about 100 to about 300 m<sup>2</sup>/g as determined by N<sub>2</sub>-BET (more preferably from about 150 to about 250 m<sup>2</sup>/g).

Depending on the level of porosity desired, one may include various amounts of monomer used in forming a CO<sub>2</sub>-philic segment, crosslinker, and/or monomer used in forming a CO<sub>2</sub>-phobic segment. With respect to the more highly swellable polymers, these polymers preferably comprise from about or above 0 to about 80 weight percent of monomer used in forming a CO<sub>2</sub>-philic segment (more preferably from about 20 to about 80 weight percent), from about 3 to about 25 weight percent of crosslinker, and from about 2 to about 90 percent by weight of monomer used in forming a CO<sub>2</sub>-phobic segment.

With respect to the more highly porous polymers, these polymers preferably comprise from about or above 0 to about 45 weight percent of monomer used in forming a CO<sub>2</sub>-philic segment, from about 55 to about 95 weight percent of crosslinker, and from about or above 0 to about 20 percent by weight of monomer used in forming a CO<sub>2</sub>-phobic segment. Additionally, in forming the more highly porous polymers, one may use any number of processing aids to help increase porosity, the selection of which is known to those skilled in the art. For example, a non-polymerizable component that is soluble in a monomer-phase but not in an aqueous phase can be used (e.g., porogen in an amount 50 v/v percent). Examples include, without limitation, small molecule organics such as toluene, *N, N*-dimethyl formamide (DMF), and the like.

The following examples are intended to illustrate the invention and do not limit the scope of the invention.

### Example 1

#### **Copolymer Synthesis**

5 Zonyl® TAN monomer (DuPont) (10 g) and 10 mol % N-acryloxysuccinimide monomer (NASI) (Polysciences, Inc) are polymerized under a nitrogen atmosphere in  $\alpha\alpha\alpha$ -trifluorotoluene at 65 °C for 20 hours using AIBN as the initiator. The resulting solution is transferred via cannula into methanol to precipitate the polymer as a white solid which is isolated by filtration and dried *in vacuo* (7.83 g, 76 % yield).

10

### Example 2

#### **Polymer Derivatization**

1 g of the 10 mol % NASI/zonyl TAN polymer is dissolved in 10 mL of Freon-113 (1,1,2-trichloro-trifluoroethane). 3-diphenylphosphino propylamine  
15 is added (0.060 g) and the reaction is stirred under N<sub>2</sub> at room temperature for several hours. A white insoluble precipitate is observed on the surface of the reaction solution. The solution is filtered to remove the white precipitate before pouring methanol to precipitate the polymer. The white solid is filtered and dried (0.74 g). Characterization by <sup>31</sup>P NMR reveals 2 minor peaks  
20 around 34 ppm and 29 ppm (phosphine oxides) and a major peak at -17 ppm (phosphine).

### Example 3

25

#### **Catalytic Hydrogenation of Olefins**

A high pressure vessel is charged with diphenylphosphino-functionalized polymer and a catalytic amount of rhodium complex such as chloro(1,5-cyclooctadiene)rhodium (I) dimer or chlorobis(ethylene)rhodium (I) dimer. An olefinic substrate is added and the vessel is pressurized with  
30 hydrogen gas (200 psig) and carbon dioxide (3000 psi). The vessel is warmed to the appropriate reaction temperature and resulting total pressure. After a sufficient reaction time, the high pressure cell is vented and the organic substrate is isolated and analyzed.

## Examples 4-9

### **Swellable Crosslinked Polymers**

5           Materials used in Examples 4-9 include gelatin, sodium dodecyl  
benzene sulfonate, poly(diallylammonium chloride), and boric acid that were  
purchased from Aldrich, Inc. Zonyl® FS-62 and Vertrel (1,1,1, 2,3,4,4,5,5,5-  
decafluoropentane), fluorosurfactant, and fluorosolvent respectively, were  
purchased from DuPont of Wilmington, Delaware. Sodium nitrile was  
10       purchased from Baker Chemical Co. of Phillipsburg, New Jersey. Sodium  
hydroxide, methanol, and tetrahydrofuran were purchased from Mallinkrodt  
Chemical of St. Louis, Missouri. All the above were used as received.  
Divinylbenzene (DVB), ethylene glycol dimethacrylate, used as crosslinkers,  
as well as styrene, were purchased from Aldrich of St. Louis, Missouri and  
15       deinhibited prior polymerization by passing them through an alumina  
adsorption column. FOMA (1,1- dihydroperfluorooctyl methyacrylate) was  
purchased from 3M along with the other monomers deinhibited prior to  
polymerization. The initiator, 2,2-azobutyronitrile (AIBN), was purchased from  
Wako Pure Chemical Industries, Ltd. of Osaka, Japan and purified by  
20       crystallization from methanol prior to utilization.

A baffled-round bottomed flask and a 30 mm TFE starburst-stirring  
head were used to achieve suspension polymerization by magnetic stirring.  
Regarding suspension by mechanical stirring, a baffled-cylindrical reaction  
vessel with a somewhat flattened base and a propeller-type impeller with a  
25       pitch of approximately 45° are used in order to optimize the flow pattern. In  
both stirring procedures, the fluid is forced initially towards the base of the  
reactor giving a vertical flow pattern. The impeller is connected to a  
laboratory overhead stirrer controlled by a mixer controller (Servodyne  
manufactured by Cole-Parmer Instrument Co. of Vernon Hills, Illinois). In  
30       these instances, a hot plate (i.e., Mirak™), fitted with an oil bath, is employed  
in control stirring speed and temperature.

Examples 4-5 illustrate the synthesis of crosslinked fluoropolymers by  
suspension polymerization carried out in an aqueous continuous phase in  
which the monomer phase is suspended in the form of droplets by virtue of a

stirrer and suspension agents. Although not wishing to be bound by any one theory, the polymerization is believed to take place within the monomer droplets yielding polymer beads. Controlled agitation and presence of stabilizers are believed to be two potentially significant factors in the success of this heterogeneous polymerization. Optimized conditions are potentially capable of yielding uniform polymer beads with a narrow size distribution as well as potentially minimize the tendency for particle coalescence.

The syntheses of styrene/divinylbenzene/FOMA and styrene/EGDMA/FOMA systems has been typically performed with 10 mol percent of crosslinking and from 0 mol percent to 50 mol percent of fluorinated monomer. All syntheses are carried out employing either a magnetic stirrer at variable stirring speeds (300 rpm to 800 rpm) or a mechanical stirrer (180 rpm as the highest speed).

#### Example 4

##### **Continuous Phase Preparation**

In 20 ml of deionized water, 0.0043 g of sodium dodecylbenzene sulfonate, 1.28 g of poly(diallylammonium chloride), 1 g of Zonyl® FS-62 and 0.0266g of boric acid are dissolved in the above order at room temperature directly into the reactor. The pH of the aqueous solution is adjusted to 10.0 by adding droplets of a 25 percent aqueous sodium hydroxide solution. Finally, 0.005g of sodium nitrile are poured into the reactor. Separately, in a 10 ml beaker, a gelatin solution is prepared with 3 ml of deionized water and 0.141 g of gelatin. This solution is subsequently heated to 50°C and added, still hot, to the aqueous continuous phase. The stirring mode is adapted to the reaction vessel, which is capped with septa, sealed, placed into an oil bath, and heated to 45°C. The mixture is flushed with nitrogen for 45 minutes. The stirring speed is set up at variable speed (from 180 rpm to 800 rpm), depending on the stirring mode (magnetic or mechanical).

#### Example 5

##### **Dispersed Phase Preparation**

Styrene, divinylbenzene, and FOMA are added along with AIBN in a round-bottomed flask that is capped with septa and sealed. The monomer

09641815, 081830  
078780, 581830

mixture is flushed for 20 min with nitrogen prior to canulation into the reaction vessel containing the aqueous continuous phase. When the oil bath temperature reaches 65°C, the dispersed phase is canulated into the main reactor. A slight positive nitrogen pressure is maintained throughout the polymerization. After 24 hours, the reaction mixture is cooled and flushed. The filtered copolymer is washed with water, methanol, tetrahydrofuran, and Vertrel until the washed solution does not turn cloudy upon addition to water. Washed copolymer beads are dried and separated into fractions with a mesh US standard sieves (38, 45, 75, 125, 250 and 500 µm) using a sieve shaker.

10

#### Example 6

#### **Crosslinked Swellable Polymer Synthesis**

Crosslinked swellable polymers were prepared by a suspension polymerization using an apparatus described in Hodge, P., Sherrington D.C., *Polymer-supported reactions in organic synthesis* **1981**, Wiley, London, Appendix and Arshady R., *Colloid Polym. Sci.* **1992**, 270:717. In a first step, an aqueous continuous phase was prepared. Stabilizers and fluorostabilizers were charged into a baffled round-bottomed reactor containing deionized water. Separately, a gelatin solution was prepared, heated to 50°C, and added, still hot, to the aqueous phase. Then, the reactor was placed into an oil bath regulated at 45°C. At the same time, a uniform stirring was established using a variable speed (from 180 rpm to 500 rpm) stirrer. Finally, the mixture was flushed with nitrogen for 45 min. During the period, the dispersed phase was prepared. Styrene, crosslinker, and FOMA were added to the round-bottomed flask as well as the water-insoluble initiator. The monomer mixture was flushed for 20 min. with nitrogen prior to cannulation into the reaction vessel containing the aqueous suspending phase. Then, the oil bath temperature was raised up to 65°C to 70°C. A slight positive nitrogen pressure was maintained throughout the polymerization. The reaction was allowed to proceed for 24 h, and then cooled to room temperature, filtered, and washed with water, methanol, tetrahydrofuran, and Vertrel until the washed solution did not turn cloudy upon addition to water. The copolymer beads were dried under vacuum and separated into fractions with US standard sieves (38, 45, 75, 125, 250, 500 µm) using a sieve shaker.

#### Example 7

##### **Incorporation of Catalyst into the Crosslinked Swellable Polymer**

5        The procedure set forth in Example 6 was employed to incorporate rhodium into the crosslinked beads. Either styphos or acrylophos was added to the monomer phase. The catalyst monomer was made by ligand exchange. To obtain porous polymer particles, porogen is added to the monomer phase prior to polymerization and extracted after recovery of the  
10       polymer beads. The pore size distributions and surface areas of the polymer beads were determined from N<sub>2</sub>-BET isotherms.

#### Example 8

##### **Effect of FOMA Content on Swellable Polymer**

15       The effect of incorporating FOMA into a polymer on percent swelling was measured for various carbon dioxide pressures. This swelling behavior was compared to a polymer that did not employ FOMA. As seen in **FIG. 1**, a polymer containing 25 mol percent FOMA exhibited superior swelling behavior to a polymer that did not employ FOMA.

20

#### Example 9

##### **Effect of FOMA Content on Swellable Polymer**

25       The effect of incorporating various levels of FOMA into a polymer on percent swelling was measured for different carbon dioxide pressures. Swelling behavior was determined for polymers with 4, 30, and 35 percent by weight of FOMA. As seen in **FIG. 2**, the polymer containing 35 mol percent  
30       FOMA in general exhibited superior swelling behavior to the other polymers.

#### Example 10

##### **Effect of Pressure and FOMA Content on Swellable Polymer**

The effect of carbon dioxide pressure and FOMA content on percent polymer swelling was measured as a function of time. Divinyl benzene was employed as the crosslinker. The pressures that were investigated were 103 bar, 172 bar, and 276 bar. Polymers having FOMA contents of 0, 10, 30, and 35 mol percent were investigated.

**FIG. 3** illustrates the results of the study. As illustrated, the percent swelling generally increased as a function of pressure and FOMA content.

#### Example 11

##### **Effect of Pressure and FOMA Content on Swellable Polymer**

Example 10 was repeated except that ethylene glycol dimethacrylate was employed as the crosslinker. **FIG. 4** shows the results of the study. In general, polymers having higher FOMA levels displayed increased swelling relative to comparable polymers depicted in Example 10.

The invention has been described in reference to the preferred examples and embodiments set forth above. It should be appreciated however that these examples and embodiments are merely intended to illustrate the invention and not limit its scope.



**THAT WHICH IS CLAIMED:**

1. A method for carrying out a catalysis reaction in carbon dioxide, said method comprising:

contacting a fluid mixture with a catalyst bound to a polymer, the fluid  
5 mixture comprising at least one reactant and carbon dioxide, wherein the reactant interacts with the catalyst to form a reaction product.

2. The method according to Claim 1, wherein the carbon dioxide is  
10 gaseous carbon dioxide.

3. The method according to Claim 1, wherein the carbon dioxide is  
15 liquid carbon dioxide.

4. The method according to Claim 1, wherein the carbon dioxide is  
supercritical carbon dioxide.

5. The method according to Claim 1, wherein said contacting step  
20 comprises a reaction taking place selected from the group consisting of a hydrogenation reaction, a hydroformylation reaction, a epoxidation reaction, and a carbon-carbon coupling reaction.

6. The method according to Claim 1, wherein the catalyst  
25 comprises a transition metal.

7. The method according to Claim 6, wherein the transition metal is  
30 selected from the group consisting of ruthenium, rhodium, palladium, platinum, vanadium, molybdenum, and a fluorosoluble material.

8. The method according to Claim 1, wherein the catalyst is an  
enzymatic catalyst.

9. The method according to Claim 8, wherein the enzymatic catalyst is selected from the group consisting of alcohol dehydrogenases, alcohol oxidase, aldolase, phosphatases, alpha-chymotrypsin, asparaginase, 5 anhydrase, catalase, creatine kinase, glutaminase, oxidases, lipases, luciferase, urease, hydratase, peroxidase, subtilisin Carlsberg and BPN', thermolysin, superoxidase, nitrileamidase, esterases, transaminase, trypsin, fumarase, amidase, acylase, peptidases, carboxylases, RNAses, glycolases, transeferases, enzymes derived from microbial sources, enzymes derived 10 from plant sources, enzymes derived from animal sources, enzymes derived from extremophiles, and mixtures thereof.

10. The method according to Claim 1, wherein the polymer is 15 soluble in carbon dioxide.

11. The method according to Claim 10, wherein the polymer comprises at least one carbon dioxide-philic group.

12. The method according to Claim 11, wherein the carbon dioxide-philic group comprises a group selected from a silicone-containing group and a fluorine-containing group. 20

13. The method according to Claim 11, wherein the carbon dioxide-philic group comprises a fluoropolymer derived from acrylate or methacrylate monomers. 25

14. The method according to Claim 1, wherein the polymer is insoluble and swellable in carbon dioxide. 30

15. The method according to Claim 14, wherein the polymer is formed from at least one monomer selected from the group consisting of styrenics,  $\alpha$ -olefins, ethylene oxides, dienes, amides, esters, sulfones, sulfonamides, imides, thiols, alcohols, diols, acids, ethers, ketones, cyanos,

amines, quaternary ammonium salts, acrylates, methacrylates, thiozoles, and mixtures thereof.

5

16. The method according to Claim 14, wherein the polymer is a copolymer formed from monomers selected from the group consisting of styrenics,  $\alpha$ -olefins, ethylene oxides, dienes, amides, esters, sulfones, sulfonamides, imides, thiols, alcohols, diols, acids, ethers, ketones, cyanos, amines, quaternary ammonium salts, acrylates, methacrylates, thiozoles, 2-(N-ethylperfluorooctane- sulfonamido) ethyl acrylate, 2-(N-ethylperfluorooctane- sulfonamido) ethyl methacrylate, 2-(N-methylperfluorooctane- sulfonamido) ethyl acrylate, 2-(N-methylperfluorooctane- sulfonamido) ethyl methacrylate, 1,1'-dihydroperfluorooctyl acrylate, 1,1'-dihydroperfluorooctyl methacrylate, 1,1',2,2'-tetrahydroperfluoroalkylacrylate, 1,1',2,2'-tetrahydroperfluoroalkyl- methacrylate,  $\alpha$ -fluorostyrene, 2,4,6-trifluoromethylstyrene, hexafluoropropylene oxide, perfluorocyclohexane oxide, tetrafluoroethylene, vinylidene fluoride, chlorotrifluoroethylene, perfluoro(propyl vinyl ether), perfluoro(methyl vinyl ether), alkyl siloxanes, fluoroalkyl siloxanes, chloroalkyl siloxanes, and mixtures thereof.

17. The method according to Claim 14, wherein the polymer is a copolymer formed from a fluoroacrylate monomer and a monomer selected from glycidyl methacrylate and styrene.

18. The method according to Claim 1, wherein the catalyst is bound to a ligand which is bound to the polymer at a plurality of locations along the chain of the polymer.

19. The method according to Claim 18, wherein the ligand is selected from the group consisting of  $\beta$ -diketone, phosphate, phosphite, salen, bis imine, pyridine-bisimine, imidazole, pyrazolyl borate, pyridine, bi- and tripyridine, porphyrin, phthalocyanine, cyclopentadienyl, phosphonate, phosphinic acid, phosphine, thiophosphinic acid, dithiocarbamate, amino, ammonium, hydroxyoxime, hydroxamic acid, calix(4)arene, macrocyclic, crown ether, 8-hydroxyquinoline, picolylamine, thiol, carboxylic acid ligands, chiral ligands, monodentate ligands, polydentate ligands, and mixtures thereof.
20. The method according to Claim 1, wherein the at least one reactant is selected from the group consisting of an olefin, hydrogen, carbon monoxide, an oxidant, oxygen, an aryl halide, a tin reagent, and a silylating reagent.
21. A composition of matter comprising:  
carbon dioxide; and  
a polymer and a reactant present in the carbon dioxide, wherein the polymer has bound thereto a catalyst at a plurality of chains along the length of the polymer, and wherein the reactant interacts with the catalyst to form a reaction product.
22. The composition according to Claim 21, wherein the carbon dioxide is gaseous carbon dioxide.
23. The composition according to Claim 21, wherein the carbon dioxide is liquid carbon dioxide.
24. The composition according to Claim 21, wherein the carbon dioxide is supercritical carbon dioxide.

25. The composition according to Claim 21, wherein the catalyst comprises a transition metal.
- 5            26. The composition according to Claim 25, wherein the transition metal is selected from the group consisting of ruthenium, rhodium, palladium, platinum, vanadium, molybdenum, and a fluorous-soluble material.
- 10           27. The composition according to Claim 21, wherein the catalyst is an enzymatic catalyst.
- 15           28. The composition according to Claim 27, wherein the enzymatic catalyst is selected from the group consisting of alcohol dehydrogenases, alcohol oxidase, aldolase, phosphatases, alpha-chymotrypsin, asparaginase, anhydrase, catalase, creatine kinase, glutaminase, oxidases, lipases, luciferase, urease, hydratase, peroxidase, subtilisin Carlsberg and BPN', thermolysin, superoxidase, nitrileamidase, esterases, transaminase, trypsin, fumarase, amidase, acylase, peptidases, carboxylases, RNAses, glycolases, transeferases, enzymes derived from microbial sources, enzymes derived  
20 from plant sources, enzymes derived from animal sources, enzymes derived from extremophiles, and mixtures thereof.
- 25           29. The composition according to Claim 21, wherein the polymer is soluble in carbon dioxide.
- 30           30. The composition according to Claim 29, wherein the polymer comprises at least one carbon dioxide-philic group.
- 30           31. The composition according to Claim 30, wherein the carbon dioxide-philic group comprises a group selected from a silicone-containing group and a fluorine-containing group.
32. The composition according to Claim 30, wherein the carbon

dioxide-philic group comprises a fluoropolymer derived from acrylate or methacrylate monomers.

5           33.    The composition according to Claim 21, wherein the polymer is insoluble and swellable in carbon dioxide.

10           34.    The composition according to Claim 33, wherein the polymer is formed from at least one monomer selected from the group consisting of styrenics,  $\alpha$ -olefins, ethylene oxides, dienes, amides, esters, sulfones, sulfonamides, imides, thiols, alcohols, diols, acids, ethers, ketones, cyanos, amines, quaternary ammonium salts, acrylates, methacrylates, thiozoles, and mixtures thereof.

15

          35.    The composition according to Claim 33, wherein the polymer is a copolymer formed from monomers selected from the group consisting of styrenics,  $\alpha$ -olefins, ethylene oxides, dienes, amides, esters, sulfones, sulfonamides, imides, thiols, alcohols, diols, acids, ethers, ketones, cyanos, amines, quaternary ammonium salts, acrylates, methacrylates, thiozoles, 2-(N-ethylperfluorooctane- sulfonamido) ethyl acrylate, 2-(N-ethyl perfluorooctane- sulfonamido) ethyl methacrylate, 2-(N-methylperfluoro octane- sulfonamido) ethyl acrylate, 2-(N-methylperfluorooctane- sulfonamido) ethyl methacrylate, 1,1'-dihydroperfluorooctyl acrylate, 1,1'-dihydroperfluoro octyl methacrylate, 1,1',2,2'-tetrahydroperfluoroalkylacrylate, 1,1',2,2'- tetrahydroperfluoroalkyl- methacrylate,  $\alpha$ -fluorostyrene, 2,4,6- trifluoromethylstyrene, hexafluoropropylene oxide, perfluorocyclohexane oxide, tetrafluoroethylene, vinylidene fluoride, chlorotrifluoroethylene, perfluoro(propyl vinyl ether), perfluoro(methyl vinyl ether), alkyl siloxanes, fluoroalkyl siloxanes, chloroalkyl siloxanes, and mixtures thereof.

20  
25  
30



41. The method according to Claim 39, wherein the carbon dioxide is gaseous carbon dioxide.

5 42. The method according to Claim 39, wherein the carbon dioxide is liquid carbon dioxide.

43. The method according to Claim 39, wherein the carbon dioxide  
10 is supercritical carbon dioxide.

44. The method according to Claim 39, wherein the polymer is  
formed from at least one monomer selected from the group consisting of  
15 styrenics,  $\alpha$ -olefins, ethylene oxides, dienes, amides, esters, sulfones,  
sulfonamides, imides, thiols, alcohols, diols, acids, ethers, ketones, cyanos,  
amines, quaternary ammonium salts, acrylates, methacrylates, thiozoles, and  
mixtures thereof.

20 45. The method according to Claim 39, wherein the polymer is a  
copolymer formed from monomers selected from the group consisting of  
styrenics,  $\alpha$ -olefins, ethylene oxides, dienes, amides, esters, sulfones,  
sulfonamides, imides, thiols, alcohols, diols, acids, ethers, ketones, cyanos,  
25 amines, quaternary ammonium salts, acrylates, methacrylates, thiozoles, 2-  
(N-ethylperfluorooctane- sulfonamido) ethyl acrylate, 2-(N-ethyl  
perfluorooctane- sulfonamido) ethyl methacrylate, 2-(N-methylperfluoro  
octane- sulfonamido) ethyl acrylate, 2-(N-methylperfluorooctane- sulfonamido)  
ethyl methacrylate, 1,1'-dihydroperfluorooctyl acrylate, 1,1'-dihydroperfluoro  
30 octyl methacrylate, 1,1',2,2'-tetrahydroperfluoroalkylacrylate, 1,1',2,2'-  
tetrahydroperfluoroalkyl- methacrylate,  $\alpha$ -fluorostyrene, 2,4,6-  
trifluoromethylstyrene, hexafluoropropylene oxide, perfluorocyclohexane  
oxide, tetrafluoroethylene, vinylidene fluoride, chlorotrifluoroethylene,



perfluoro(propyl vinyl ether), perfluoro(methyl vinyl ether), alkyl siloxanes, fluoroalkyl siloxanes, chloroalkyl siloxanes, and mixtures thereof.

5            46.    The method according to Claim 39, wherein the polymer is a copolymer formed from a fluoroacrylate monomer and a monomer selected from glycidyl methacrylate and styrene.

10           47.    A method for carrying out a catalysis reaction in carbon dioxide, said method comprising:

              contacting a liquid or supercritical fluid medium with a catalyst bound to a polymer, the fluid medium comprising at least one reactant and wherein the reactant interacts with the catalyst to form a reaction product.

15

              48.    The method according to Claim 47, wherein the fluid medium is selected from the group consisting of hydrofluorocarbons, perfluorocarbons, hydrocarbons, noble gases, and mixtures thereof.

## CARBON DIOXIDE-SOLUBLE POLYMERS AND SWELLABLE POLYMERS FOR CARBON DIOXIDE APPLICATIONS

### Abstract of the Disclosure

- 5           A method for carrying out a catalysis reaction in carbon dioxide comprising contacting a fluid mixture with a catalyst bound to a polymer, the fluid mixture comprising at least one reactant and carbon dioxide, wherein the reactant interacts with the catalyst to form a reaction product. A composition of matter comprises carbon dioxide and a polymer and a reactant present in
- 10   the carbon dioxide. The polymer has bound thereto a catalyst at a plurality of chains along the length of the polymer, and wherein the reactant interacts with the catalyst to form a reaction product.

00441815 081800

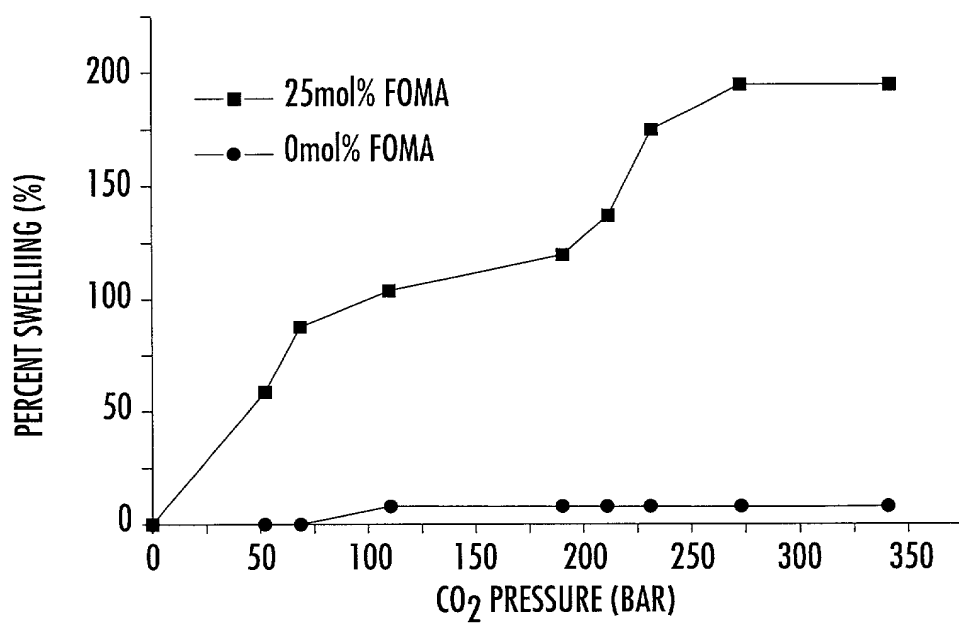


FIG. 1.

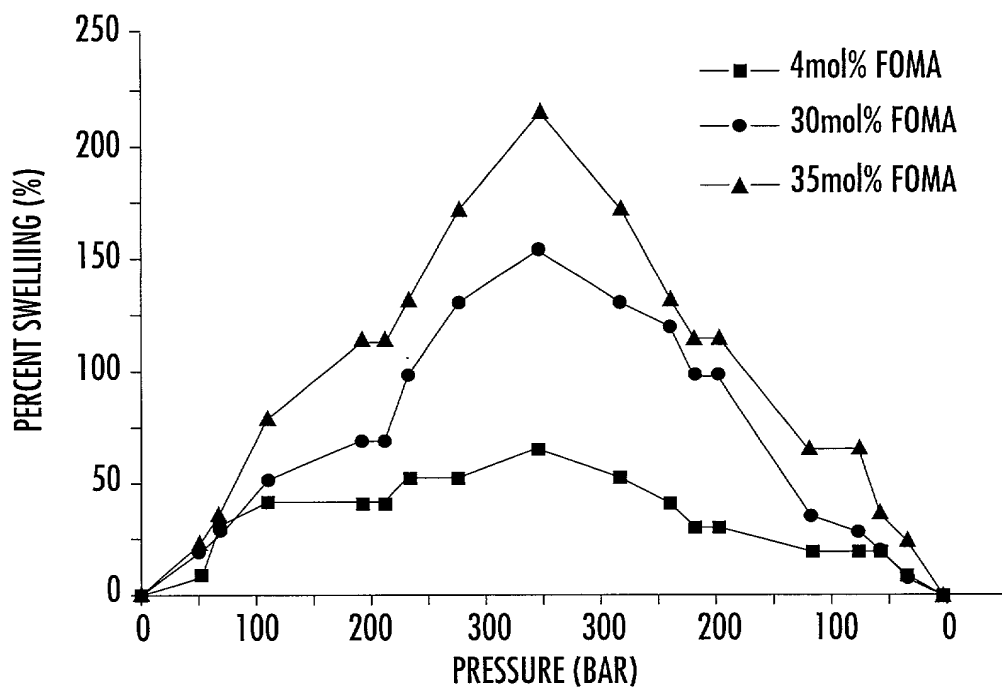


FIG. 2.

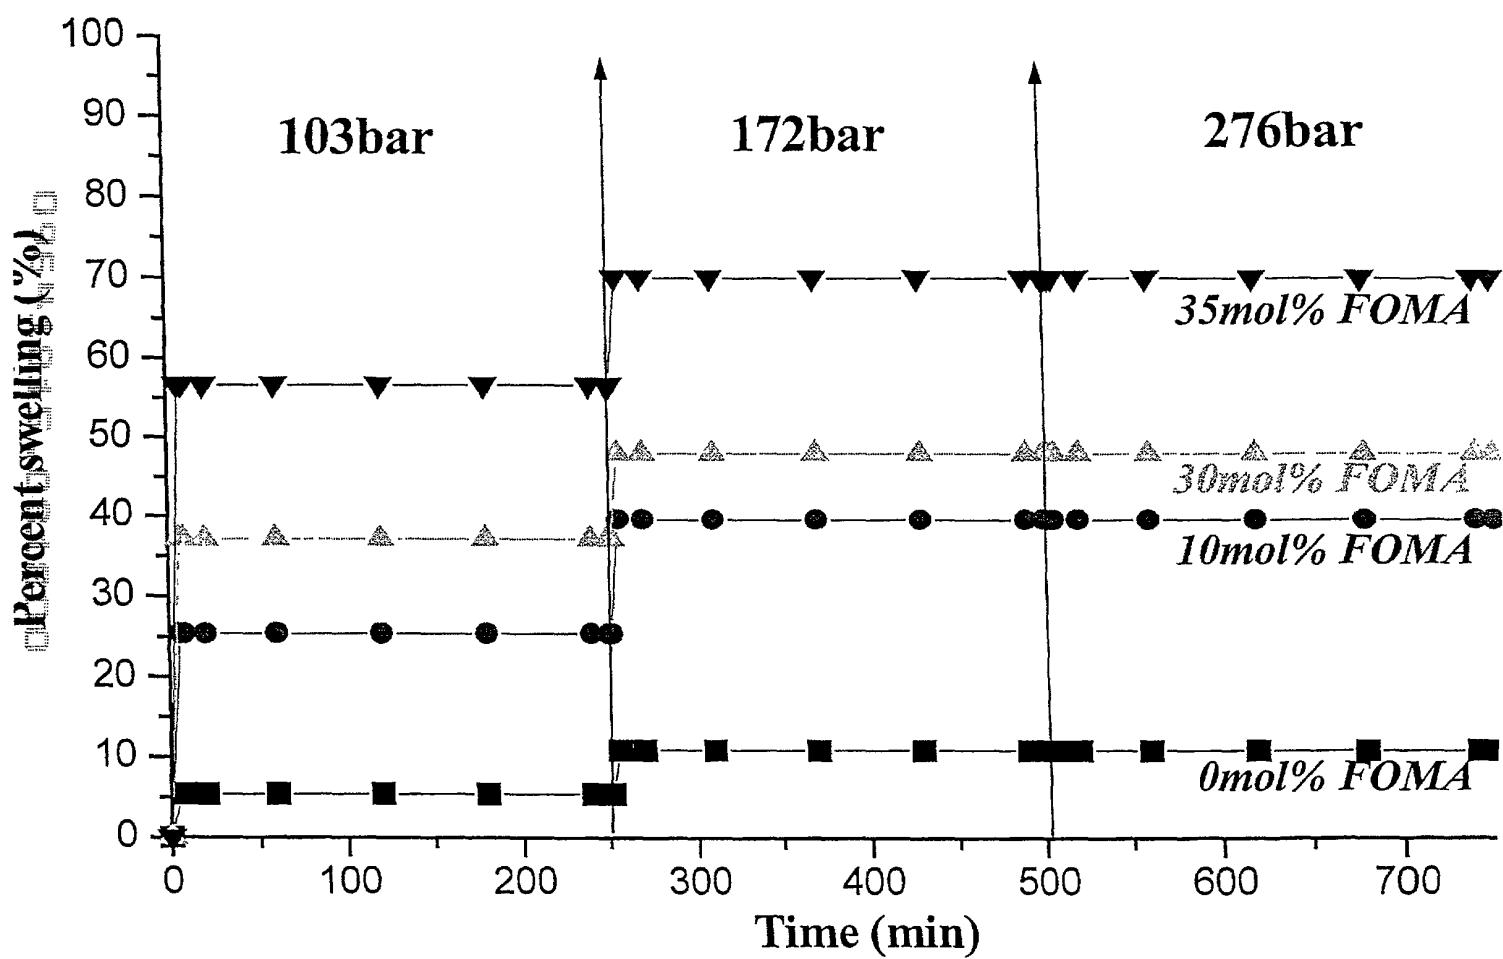


FIG. 3



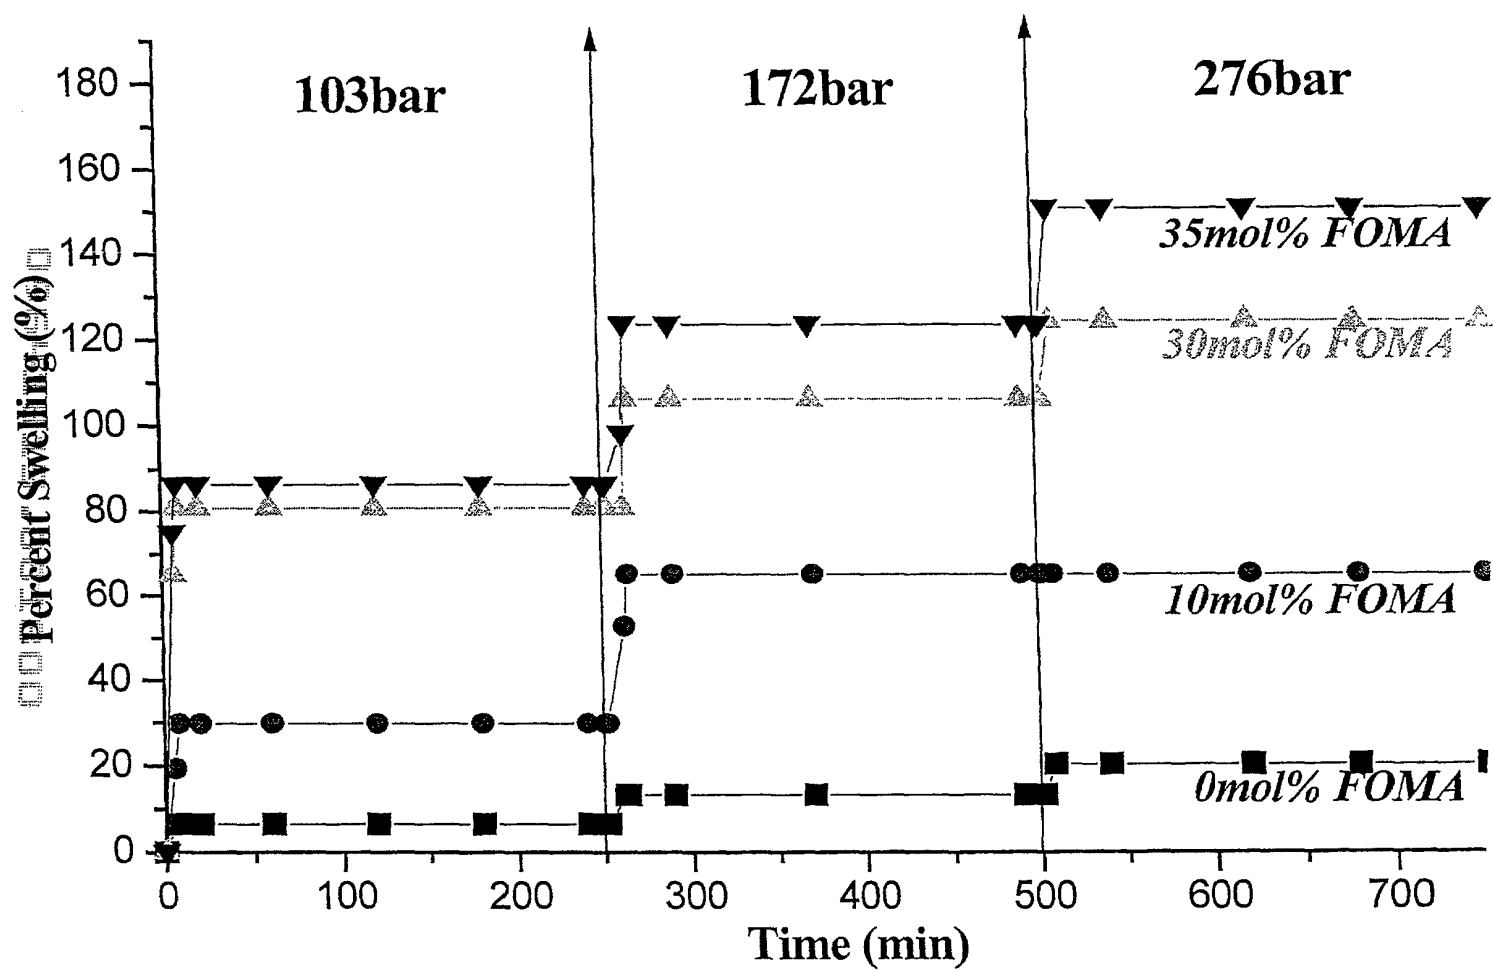


FIG. 4

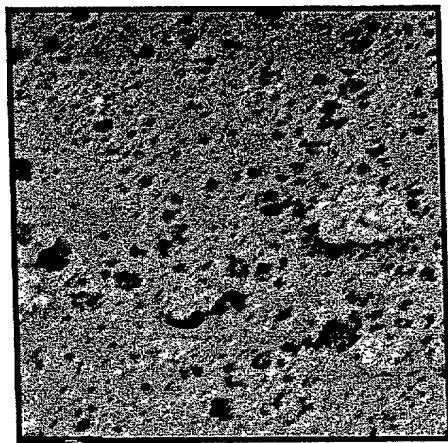

1  $\mu\text{m}$  0717

FIG. 5A

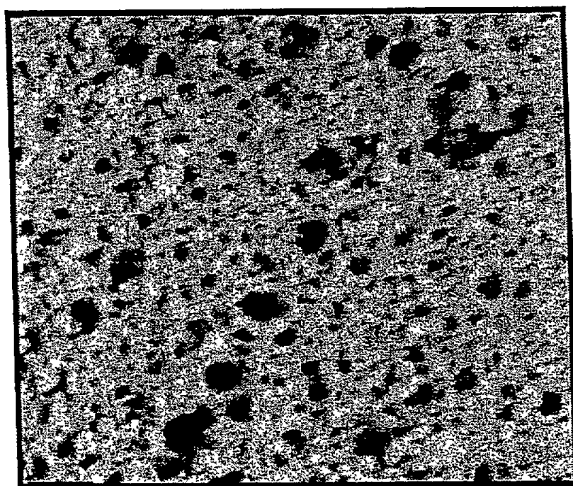

1  $\mu\text{m}$

FIG. 5B

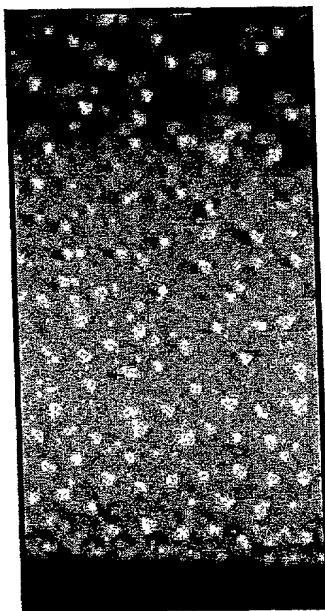


FIG. 6A

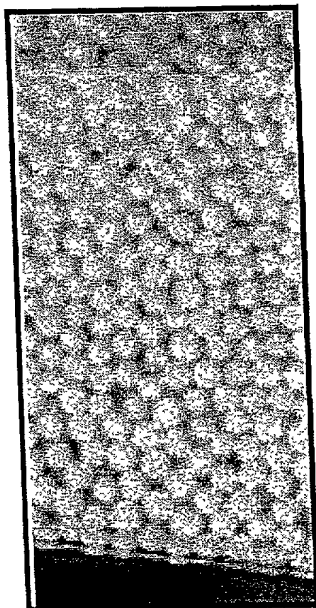


FIG. 6B